

Easy-To-Use Homeowners Plow with Super Slick Corrosion Free Poly Moldboard



SNO-PRO HOME-PRO

Sno-Pro Home-Pro Light Weight Poly

- Hitch-n-Run® System, fastest attachment and detachment
- Specifically built for compact and light duty trucks
- Hide-Away Hydraulics, cavity tucks away hydraulic power system
- Hydraulic Jack Stand, this patented device utilizes hydraulics to position the plow at the exact height required for reattachment
- Full Trip Design, built to withstand season after season of hard use.
- World Class Fit and Finish, light weight poly
- Hide-Away Mount, clean and professional describes our remaining receiver frame when the plow is removed
- High visibility low profile halogen headlamps with park/turn signal lights

SPECIFICATION	7'	7 1/2'
Blade Width (straight)	84"	90"
Plowing Width (full angle)	74"	79.5"
Blade Height	24"	26"
Blade Skin Thickness	3/16" Poly	3/16" Poly
Cutting Edge	1" x 6" Poly Reversible	1" x 6" Poly Reversible
Cutting Edge Attack Angle	18°	18°
Vertical Ribs	5	5
Trip Springs	2	2
Angle Cylinders	1.5" x 10"	1.5" x 10"
Lift Cylinder	1.5" x 7.5"	1.5" x 7.5"
Skid Shoes - Cast Iron	N/A	N/A
Sector	45°	45°
Attachment System	HITCH-N-RUN SYSTEM®	
Jack System	Switch Activated Hydraulic	Switch Activated Hydraulic
Average Weight	430 lbs.	450 lbs.



Superior Fit and Finish Together with an Amazingly Strong Structure

The Original - The Best!



SNO-PRO 3000 FULL-TRIP

Sno-Pro Full-Trip All Steel Features

- Hitch-n-Run® System, fastest attachment and detachment
- Hide-Away Hydraulics, cavity tucks away hydraulic power system
- Hydraulic Jack Stand, this patented device utilizes hydraulics to position the plow at the exact height required for reattachment
- Extended Push Frame, widest on the market, measures 4-feet end-to-end
- Full Trip Design, built to withstand season after season of hard use.
- Aggressive attack angle provides better scraping ability.
- Center punched cutting edge extends life, just flip to new clean edge
- Hide-Away Mount, clean and professional describes our remaining receiver frame when the plow is removed
- High visibility low profile halogen headlamps with park/turn signal lights

SPECIFICATION	7 1/2'	8'	8 1/2'	9'
Blade Width (straight)	90"	96"	102"	108"
Plowing Width (full angle)	79.5"	85"	90"	95"
Blade Height	28"	28"	28"	28"
Blade Skin Thickness	11 Ga	11 Ga	11 Ga	11 Ga
Cutting Edge	3/8" x 6" High Carbon Reversible	3/8" x 6" High Carbon Reversible	1/2" x 6" High Carbon Reversible	1/2" x 6" High Carbon Reversible
Cutting Edge Attack Angle	18°	18°	18°	18°
Vertical Ribs	6	8	8	8
Trip Springs	4	4	4	4
Angle Cylinders	1.5" x 10"	1.5" x 10"	1.5" x 10"	1.5" x 10"
Lift Cylinder	1.5" x 7.5"	1.5" x 7.5"	1.5" x 7.5"	1.5" x 7.5"
Skid Shoes - Cast Iron	2	2	2	2
Sector	54°	54°	54°	54°
Attachment System	HITCH-N-RUN SYSTEM®			
Jack System	Switch Activated Hydraulic	Switch Activated Hydraulic	Switch Activated Hydraulic	Switch Activated Hydraulic
Average Weight	685 lbs.	725 lbs.	765 lbs.	785 lbs.

Heavy-Duty Contractor Plow with Super Slick Corrosion Free Poly Moldboard



The Professionals Choice!

SNO-PRO 3000 FULL-TRIP POLY

Sno-Pro Full-Trip Poly Features

- Hitch-n-Run® System, fastest attachment and detachment
- Hide-Away Hydraulics, cavity tucks away hydraulic power system
- Hydraulic Jack Stand, this patented device utilizes hydraulics to position the plow at the exact height required for reattachment
- Extended Push Frame, widest on the market, measures 4-feet end-to-end
- Full Trip Design, built to withstand season after season of hard use
- Slick polymer surface allows faster and easier snow removal
- Hide-Away Mount, clean and professional describes our remaining receiver frame when the plow is removed
- High visibility low profile halogen headlamps with park/turn signal lights

SPECIFICATION	7 1/2'	8'
Blade Width (straight)	90"	96"
Plowing Width (full angle)	79.5"	85"
Blade Height	28"	28"
Blade Skin Thickness	3/8" Poly	3/8" Poly
Cutting Edge	3/8" x 6" High Carbon Reversible	3/8" x 6" High Carbon Reversible
Cutting Edge Attack Angle	18°	18°
Vertical Ribs	6	8
Trip Springs	4	4
Angle Cylinders	1.5" x 10"	1.5" x 10"
Lift Cylinder	1.5" x 7.5"	1.5" x 7.5"
Skid Shoes - Cast Iron	2	2
Sector	54°	54°
Attachment System	HITCH-N-RUN SYSTEM®	
Jack System	Switch Activated Hydraulic	Switch Activated Hydraulic
Average Weight	695 lbs.	735 lbs.



Extensive Moldboard Bracing Provides Superior Strength and Durability

Heavy-Duty Bottom TRIP-EDGE Design



Featuring New Hydraulic Jack Leg


SNO-PRO TRIP-EDGE

Sno-Pro Trip-Edge Powder Coat Steel Features

- Hitch-n-Run® System, fastest attachment and detachment.
- New reliable trip-edge design.
- Hydraulic Jack Stand, this patented device utilizes hydraulics to position the plow at the exact height required for reattachment.
- Available in traditional steel material.
- World Class Fit and Finish, powder coat steel.
- Hide-Away Mount, clean and professional describes our remaining receiver frame when the plow is removed.
- High visibility low profile halogen headlamps with park/turn signal lights.

SPECIFICATION	7 1/2'	8'	8 1/2'	9'
Blade Width (straight)	90"	96"	108"	108"
Plowing Width (full angle)	79.5	85"	95"	95"
Blade Height	28"	28"	28"	28"
Blade Skin Thickness	11 Ga	11 Ga	11 Ga	11 Ga
Cutting Edge	3/8" x 6" High Carbon Reversible	3/8" x 6" High Carbon Reversible	1/2" x 6" High Carbon Reversible	1/2" x 6" High Carbon Reversible
Cutting Edge Attack Angle	18°	18°	18°	18°
Vertical Ribs	6	8	8	8
Trip Springs	4	4	4	4
Angle Cylinders	1.5" x 10"	1.5" x 10"	1.5" x 10"	1.5" x 10"
Lift Cylinder	1.5" x 10"	1.5" x 10"	1.5" x 10"	1.5" x 10"
Skid Shoes - Cast Iron	2	2	2	2
Sector	N/A	N/A	N/A	N/A
Attachment System	HITCH-N-RUN SYSTEM®			
Jack System	Switch Activated Hydraulic	Switch Activated Hydraulic	Switch Activated Hydraulic	Switch Activated Hydraulic
Average Weight	722 lbs.	767 lbs.	812 lbs.	822 lbs.

NEW MODEL!

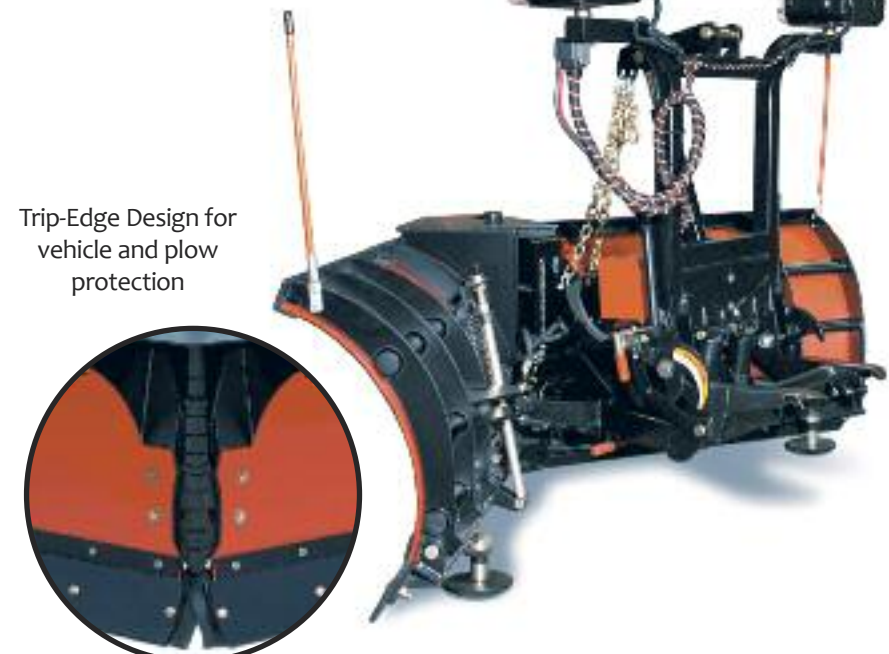


Trip-Edge Design for vehicle and plow protection

SNO-PRO V-PLOW POLY

Sno-Pro V-Plow Poly Features

- Hitch-n-Run® System, fastest attachment and detachment
- Commercial grade hydraulics package (heavy-duty larger pump and reservoir)
- Spring Loaded Jack Stand, to position the plow at the exact height required for reattachment
- Trip-Edge Design for vehicle and plow protection
- World Class Fit and Finish/Polymer Plastic
- Hide-Away Mount, clean and professional describes our remaining receiver frame when the plow is removed
- High visibility low profile halogen headlamps with park/turn signal lights

SPECIFICATION	8'2"	9'2"
Blade Width (straight)	98"	110"
Plowing Width (full angle)	86"	98"
Blade Height	28"	28"
Blade Skin Thickness	11 Ga	11 Ga
Cutting Edge	1/2" x 6" High Carbon Reversible	1/2" x 6" High Carbon Reversible
Cutting Edge Attack Angle	18°	18°
Vertical Ribs	6	6
Trip Springs	4	4
Angle Cylinders	2" x 10"	2" x 10"
Lift Cylinder	1.5" x 10"	1.5" x 10"
Skid Shoes - Cast Iron	4	4
Sector	N/A	N/A
Attachment System	HITCH-N-RUN SYSTEM®	
Jack System	Spring Loaded Kick Stand	Spring Loaded Kick Stand
Average Weight	940 lbs.	970 lbs.

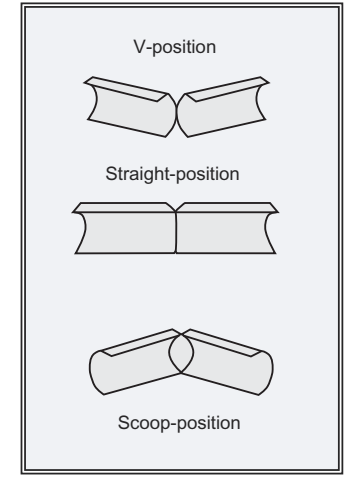

**Commercial/ Municipal
Plow with Super Slick
Corrosion Free Poly
Moldboard**



**SPECIAL ORDER
ONLY**

NEW FEATURES


Halogen Headlights

The New Halogen Headlights are now available for all model Sno-Pro snow plows. Each features two individual lights for high and low beam as well as a separate directional light.



Universal Harness

The new Universal Harnesses now fit all model Sno-Pro snow plows

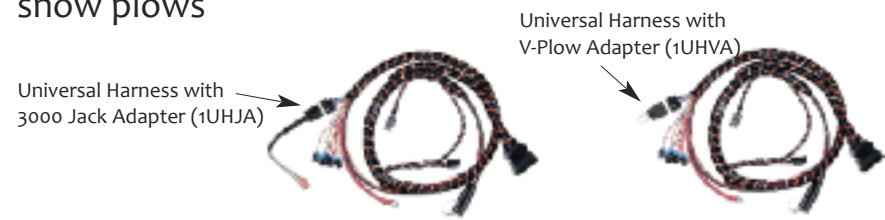

TAILGATE SPREADERS



Fast-Cast 300
3.0 Cu. Ft./180 lbs.
(Part No. 1CS9)

Fast-Cast 2000
5.0 Cu Ft/350 lb
(Part No. 1CS1)



**World's Fastest
Attachment
Snowplow!**



Easy as 1-2-3

Step 1



Vehicle approaches snowplow from various angles and heights. Our patented tapered design self-aligns plow with vehicle.

Step 2



Plow latch hooks engage and rotate to attached position. The patented semi-automatic cam rotates latch hooks through cycle.

Step 3



Connect 2 plugs and safety latches and your running. The patented hydraulic jack stand automatically retracts when plow lifts.



Fits:
Chevy/GMC,
Ford, Dodge,
Toyota, Nissan,
Sterling and Jeep

HEAVY DUTY / COMMERCIAL

Sno-Pro Commercial Powder Coated Steel

- Hitch-n-Run® System, fastest attachment and detachment.
- Powerful hydraulic system, with 2" dia. angle and lift cylinders.
- Flip Down Jack Stand, this device drops to position the plow at the exact height required for reattachment.
- Commercial grade for heavy-duty trucks.
- World Class Fit and Finish, corrosion free poly moldboard and rugged reinforced powder coated steel frame.
- Hide-Away Mount, clean and professional describes our remaining receiver frame when the plow is removed.

SPECIFICATION	9' HD	10' HD
Blade Width (straight)	108"	120"
Plowing Width (full angle)	95"	104"
Blade Height	33"	33"
Blade Skin Thickness	3/8" Poly	3/8" Poly
Cutting Edge	5/8" x 6" High Carbon Reversible	5/8" x 6" High Carbon Reversible
Cutting Edge Attack Angle	18°	18°
Vertical Ribs	10	10
Trip Springs	6	6
Angle Cylinders	2" x 12"	2" x 12"
Lift Cylinder	2" x 10"	2" x 10"
Skid Shoes - Cast Iron	4	4
Sector	62°	62°
Attachment System	HITCH-N-RUN SYSTEM®	
Jack System	Spring Loaded Kick Stand	Spring Loaded Kick Stand
Average Weight	1100 lbs.	1175 lbs.



Unique Poly Moldboard Supported by Reinforced Tubular Frame

Visit: Snoproplovs.com for Special Ordering

ACCESSORIES



SNOW DEFLECTOR (RUBBER)
Part No. 1SD1
Fits: All Plow Sizes




SNOW DEFLECTOR (METAL)
Part No. Fits
1SD751 7-1/2' Plows
1SD81 8' Plows
1SD91 9' Plows



SNO-PRO WINGS
Sno-Pro 3000 and TripEdge
P/N:1SPW1
• 22 deg. Forward Pitch
• Rubber cutting edge
• Attachment & removal with quick pins
• 20" x 19"



RUBBER CUTTING EDGE
Part No. 9PRU1
Sold by Foot



HI-PERFORMANCE SNOW OIL
Part No. 1TBP123 12 qt.
Part No. 1TBP123B 5 ga.



FINGER TIP CONTROL
Part No. 1TBP60A
Fits: All Plow Sizes (except V-Plow)



SNO-PRO 3000 WEATHER COVER
Part No. 1WC1
Fits: All Plow Sizes



EMERGENCY PARTS KIT
Part No. 1TBP61C
Fits: 3000 Series

V-BOX SPREADERS



Fast-Cast 550
Gas Motor/Aluminum Hopper
1/3 Yard Spreader
(Part No. 1CS6H)



Fast-Cast 550
Electric Motor/Aluminum Hopper
1/3 Yard Spreader
(Part No. 1CS6E)

Vehicles intended to be equipped with a snowplow or spreader must comply with the vehicle manufacturer's specifications for equipment application. Do not exceed vehicle weight ratings with a snowplow or spreader. Curtis Industries, LLC reserves the right, under its product improvement program to change product specifications or design features without reference illustrations or specifications herein.

Curtis Snowplows are protected by the following U.S. Patent numbers: 6,145,222 and 6,209,231 and Licensed under U.S. Patent No. 5,568,694 and Canadian Patent No. 2,137,853. Other patents pending.

Prices, product and specifications are subject to change without notice or liability. Availability is subject to production, stocking and demand.



- Part# 1HHC - Handheld Controller**
- Four-way handheld controller
 - Automatic shut-off (when not in use)
 - Express up/down feature
 - Illuminated keys for night-time plowing
 - All-function, time-out, protects pumps motor and battery drain
 - Left or right-handed use
 - Dash mount included
 - Fits all Sno-Pro straight-blade plows
 - New replacement for 1HC1 and 1TP1 Controllers
 - 2 year warranty



Introducing our New Sno-Pro® handheld controllers. These ergonomic controllers are weather resistant, strong, comfortable and will provide years of trouble-free use.

- Part# 1HHV - V-Plow Handheld Controller**
- 10 function handheld controller
 - Automatic shut-off (when not in use)
 - Express Vee/Scoop feature
 - Illuminated keys for night-time plowing
 - All-function, time-out, protects pumps motor and battery drain
 - Left or right-handed use
 - Dash mount included
 - Fits all Sno-Pro V-Plows
 - New replacement for 1TP1V and 1TP1VA Controllers
 - 2 year warranty



**SNOW AND
ICE CONTROL**